

COPY FOR IB
PATENT COOPERATION TREATY
PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

REC'D 05 NOV 2004



WIPO PCT

28 FEB 2005

Applicant's or agent's file reference P03620DP	FOR FURTHER ACTION	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
International application No. PCT/KR2003/001624	International filing date (day/month/year) 12 AUGUST 2003 (12.08.2003)	Priority date (day/month/year) 29 AUGUST 2002 (29.08.2002)
International Patent Classification (IPC) or national classification and IPC IPC7 H04M 3/58		
Applicant SK TELECOM CO., LTD et al		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
2. This REPORT consists of a total of 3 sheets, including this cover sheet.
- ☐ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).
- These annexes consist of a total of _____ sheets.

3. This report contains indications relating to the following items:
- I ☒ Basis of the report
 - II ☐ Priority
 - III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
 - IV ☐ Lack of unity of invention
 - V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
 - VI ☐ Certain documents cited
 - VII ☐ Certain defects in the international application
 - VIII ☐ Certain observations on the international application

Date of submission of the demand 24 MARCH 2004 (24.03.2004)	Date of completion of this report 27 OCTOBER 2004 (27.10.2004)
Name and mailing address of the IPEA/KR  Korean Intellectual Property Office 920 Dunsan-dong, Seo-gu, Daejeon 302-701, Republic of Korea Facsimile No. 82-42-472-7140	Authorized officer UHM, In Kwon Telephone No. 82-42-481-5712 

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/KR2003/001624

I. Basis of the report

1. With regard to the elements of the international application:*

- ☒ the international application as originally filed
- ☐ the description:
pages _____, as originally filed
pages _____, filed with the demand
pages _____, filed with the letter of _____
- ☐ the claims:
pages _____, as originally filed
pages _____, as amended (together with any statement) under Article 19
pages _____, filed with the demand
pages _____, filed with the letter of _____
- ☐ the drawings:
pages _____, as originally filed
pages _____, filed with the demand
pages _____, filed with the letter of _____
- ☐ the sequence listing part of the description:
pages _____, as originally filed
pages _____, filed with the demand
pages _____, filed with the letter of _____

2. With regard to the language, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language _____ which is

- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).

3. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. ☐ The amendments have resulted in the cancellation of:

- ☐ the description, pages _____
- ☐ the claims, Nos. _____
- ☐ the drawings, sheet _____

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)).**

* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this opinion as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

** Any replacement sheet containing such amendments must be referred to under item I and annexed to this report.

INTERNATIONAL PRELIMINARY EXAMINATION

International application No.

PCT/KR2003/001624

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**1. Statement**

Novelty (N)	Claims	1-11	YES
	Claims		NO
Inventive step (IS)	Claims	1-11	YES
	Claims		NO
Industrial applicability (IA)	Claims	1-11	YES
	Claims		NO

2. Citations and explanations (Rule 70.7)

Reference is made to the following document:

D = KR 10-2002-39501 A (2002.05.27)

Novelty

D does not reveal that HLR provides an arbitrary sound to replace a conventional tone in a communication network. Therefore, the invention according to claims 1-11 is considered to be novel.

Inventive step

Claims 1-11 relate to a method for providing various sounds chosen by a called subscriber instead of a common Ring Back Tone and a Call-Waiting Tone which are provided to a caller who has subscribed to Call-Waiting Service.

D discloses a method for an advertisement guide service on a mobile communication network provided to effectively use the communication resources and lines by giving a discount on a call charge and accumulated use charge according to the time used for hearing and watching an advertisement message from the call initialization to the call setup.

Comparing the present invention according to claims 1-11 with D, they are similar in providing various sounds chosen by a called subscriber instead of a common Ring Back Tone. But, they differ in the location of the function of providing an arbitrary sound instead of a common Ring Back Tone.

Therefore, claims 1-11 of this invention are considered to involve an inventive step.

Industrial Applicability

The subject matter of claims 1-11 fulfills the requirements of Article 33(4) PCT because it is useful.

(19) World Intellectual Property
Organization
International Bureau



28 FEB 2005



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/021690 A1

(51) International Patent Classification⁷: H04M 3/58

(21) International Application Number:
PCT/KR2003/001624

(22) International Filing Date: 12 August 2003 (12.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2002-0051548 29 August 2002 (29.08.2002) KR

(71) Applicant (for all designated States except US): SK
TELECOM CO., LTD [KR/KR]; 99, Seorin-Dong,
Jongro-Ku, Seoul 110-110 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HAHM, Hee Hyeok
[KR/KR]; 705-2602, Shindong-A River-Park, Noryan-
gin-dong, Dongak-gu, Seoul 156-050 (KR). KIM, Ki


Mun [KR/KR]; 202-401, Shinmyung-Boram Apt., 497-1,
Boogae 3-dong, Boopyung-gu, Incheon-si 403-103 (KR).
LEE, Sang Yun [KR/KR]; 109-802, Saetbyul Apt., Bun-
dang-dong, Bundang-gu, Seongnam, Kyunggi-do 463-030
(KR). NO, Yeong Tae [KR/KR]; 201, Choongang Apt.,
1684-9, Shinrim 12-dong, Gwanak-gu, Seoul 151-796
(KR).

(74) Agent: PARK, Lae Bong; 1Fl., Dongun Bldg., 413-4, Do-
gok 2-dong, Kangnam-gu, Seoul 135-272 (KR).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK,
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,
MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: METHOD FOR PROVIDING A TONE REPLACING SOUND CHOSEN BY A SUBSCRIBER IN CALL WAITING SERVICE

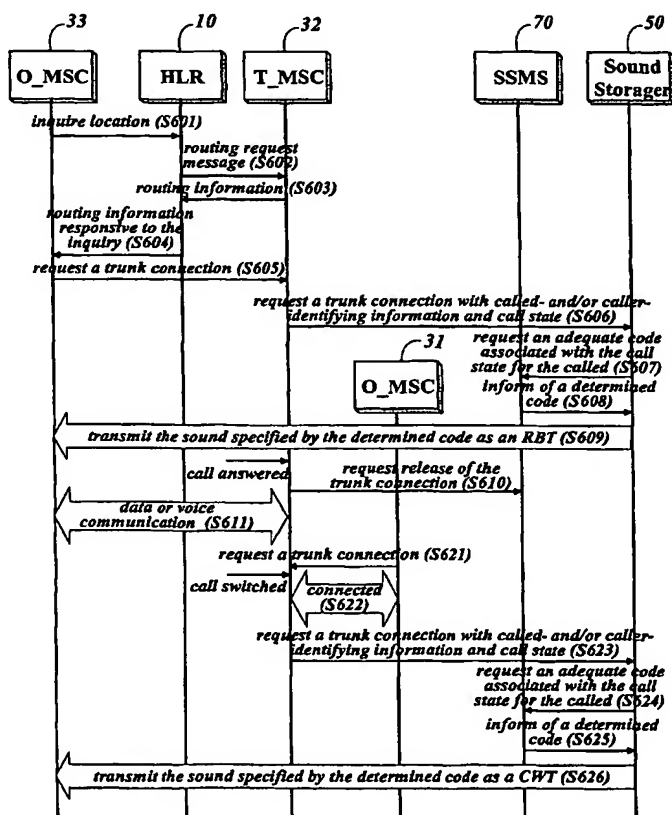

(57) Abstract: The present invention relates to method for providing an arbitrary sound chosen by a called subscriber instead of an ordinary tone to a calling or call-waiting subscriber. In this present invention, if a call is received, a terminating exchanger requests a trunk connection to a sound db server based on the first information on whether or not to replace an ordinary tone and the second information on a route to the sound db server that were received from a home location register (HLR) when a called was registered, and provides the called identification and call state (idle/busy or call-waiting, etc.) for the sound server. Then, the sound db server searches its db for a sound associated with the call state specified by the called, and provides the found sound for the caller instead of a conventional tone via the terminating exchanger. Through this sequential procedure of network elements, a caller can hear a sound specified by a called instead of a dry ordinary tone.



(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DESCRIPTION

METHOD FOR PROVIDING A TONE REPLACING SOUND CHOSEN BY A SUBSCRIBER IN CALL WAITING SERVICE

1. TECHNICAL FIELD

5 The present invention relates to a method for providing an arbitrary sound chosen by a called subscriber for a calling subscriber instead of a conventional RBT (RingBack Tone).

 The present invention further relates to a method for providing an arbitrary sound chosen by a called subscriber
10 instead of a common RBT and a CWT (Call-Waiting Tone) that are provided for a caller in case that the called has been subscribed to CWS (Call-Waiting Service).

2. BACKGROUND ART

 When a subscriber calls another through a mobile
15 communication network, a terminating exchanger on the network provides the caller with a uniform RBT.

 Since the RBT is same all the time, a caller can not identify a called before the called answers. Furthermore, the uniform RBT can not satisfy various subscribers' needs to reveal
20 their personality.

 In addition, a mobile communication network provides CWS in commerce. In CWS, however, an exchanger serving a called and a former caller, who are talking each other, provides a latter caller with a uniform RBT, and also provides a uniform CWT, which
25 is different in sound from RBT, for a call waiter who is selected to wait by the called. Therefore, a latter caller can not

identify a called before the called answers and the uniform CWT can not satisfy various subscribers' needs to reveal their personality.

On the other hand, various ad methods are being proposed in these days. One of these ad methods is to send an ad sound message to a caller instead of a conventional ringback tone. However, such an ad sound message is chosen unilaterally by a network operating enterprise. If a caller heard such a unilateral ad sound he or she could talk over a mobile telephone with a called for a limited time.

However, the method that an ad sound is provided instead of a conventional RBT still has the aforementioned drawbacks. That is, a caller can not identify a called before the called answers and the uniform RBT can not satisfy various subscribers' needs to reveal their personality as explained above.

3. DISCLOSURE OF INVENTION

It is an object of the present invention to provide method for providing an arbitrary sound chosen or registered by a called subscriber for a caller or a call waiter instead of a conventional RBT and/or CWT. In the present method, an arbitrary tone-replacing sound chosen or registered by a subscriber is stored in a server separated from mobile exchangers first, and if a certain subscriber, who is already in communication with a former caller, is called again, a terminating exchanger for the additional call receives from the server a tone-replacing sound that is assigned to the called, and then provides the received sound for a latter caller instead of a conventional RBT. And, the terminating exchanger provides one of the callers, who is selected to wait call reconnection by the called, with a CWT-

replacing sound received from the sever instead of a conventional common CWT.

A method of providing an arbitrary sound to replace a conventional tone in a communication network in accordance with the present invention is characterized in that it comprises: a first step, conducted by an HLR (Home Location Register), of furnishing an exchanger, when a terminal is registered through the exchanger, with first information on whether an ordinary tone is to be replaced or not and second information informing a route to a sound providing means; a second step, conducted by the exchanger, of requesting a trunk connection to the sound providing means, if the terminal is called by a caller, based on the first and the second information while furnishing the sound providing means with third information on call state; and a third step, conducted by the sound providing means, of determining a tone-replacing sound based on the received third information for the terminal, and providing the determined tone-replacing sound as an RBT to the caller through the exchanger which the trunk connection is made to.

Another method of providing an arbitrary sound to replace a conventional tone in a communication network in accordance with the present invention is characterized in that it comprises: a first step, conducted by an HLR, of furnishing an exchanger, when a terminal is registered through the exchanger, with first information on whether an ordinary tone is to be replaced or not and second information informing a route to a sound providing means; a second step, conducted by the exchanger, of requesting a first trunk connection to the sound providing means, if the terminal is called by a latter caller under already-connected condition to a former caller, based on the first and the second

information while providing the sound providing means with third information on call state; a third step, conducted by the sound providing means, of determining a tone-replacing sound based on the received third information for the terminal, and providing
5 the determined tone-replacing sound as an RBT to the latter caller through the exchanger; a fourth step, conducted by the exchanger, of requesting release of the first trunk connection to the sound providing means, if the terminal accepts the call from the latter caller, and requesting a second trunk connection to
10 the sound providing means for the connected former caller while providing the sound providing means with fourth information on call-switched; and a fifth step, conducted by the sound providing means, of determining a tone-replacing sound based on the received fourth information for the terminal, and providing the
15 determined tone-replacing sound as a CWT to the former caller through the exchanger which the second trunk connection is made to.

In the methods, the third information is to indicate that the called, who has subscribed to CWS, is busy, namely already-
20 connected, and the fourth information is to indicate that either of callers is made to call-waiting state by the called.

The above-characterized tone replacing sound providing method is able to decrease caller's cancellation and/or call-waiter's drop of a call connected to a called who has subscribed
25 to CWS.

In addition, the method can provide a personal ad way by allowing a registered personal introducing or identifying sound to be used instead of an RBT. Moreover, a caller is able to know by only hearing a tone-replacing sound whether he or she called
30 rightly. An enterprise as well as individual persons can

advertise efficiently through registering a tone-replacing sound.

4. BRIEF DESCRIPTION OF DRAWINGS

In the drawings:

Fig. 1 is a simplified diagram of a mobile communication
5 network which a subscriber-based tone-replacing sound providing
method is embedded in;

Fig. 2 is a procedure chart to subscribe to a subscriber-
based tone-replacing sound providing service in accordance with
the present invention;

10 Fig. 3 is a procedure chart to change/add tone-replacing
sound to be used in tone replacement service in accordance with
the present invention;

Fig. 4 is a procedure chart to terminate a subscriber-based
tone-replacement service in accordance with the present
15 invention;

Fig. 5 is a procedure chart of an embodiment of the present
invention to conduct a CWS subscriber-based tone-replacing
service;

20 Fig. 6 is a procedure chart of another embodiment of the
present invention to conduct a CWS (Call Waiting Service)
subscriber-based tone-replacing service;

Fig. 7 shows format of the value-added service parameters
including a tone-replacing service setting field that are
delivered from an HLR to a call-terminating exchanger; and

25 Fig. 8 shows an exemplary tone service table managed by a
sound storager managing server to embody a tone-replacing sound
providing service in accordance with the present invention.

5. MODES FOR CARRYING OUT THE INVENTION

In order that the invention may be fully understood, a

preferred embodiment thereof will now be described with reference to the accompanying drawings.

Fig. 1 is a simplified diagram of a mobile communication network which a CWS subscriber-based tone-replacing sound providing method is embedded in.

The network of Fig. 1 includes an HLR (Home Location Register) 10; mobile exchangers 31, 32 and 33 (also called 'MSC' (Mobile Switching Center)) being capable of communicating with the HLR 10 via a No. 7 signaling network 20 based on No.7 signaling transfer protocol; a sound storager 50, connected to the No. 7 signaling network 20 via a gateway 40, storing tone-replacing sounds and communicating with the exchangers 31, 32 and 33; an SSMS (Sound Storager Managing Server) 70, connected to the sound storager 50 via Internet 60, controlling management of tone-replacing sounds in the sound storager 50; a subscriber db 80 connected to the HLR 10 via Internet 60; and a web server 100, connected to Internet 60 via a gateway 90, communicating with the sound storager 50 and the SSMS 70.

The HLR 10 functions as a conventional network element and it has in every subscriber profile the first information on whether an ordinary tone is to be replaced or not and the second information informing a route to the sound storager 50. The first and the second information are written in the value-added service parameters of each subscriber profile.

Every mobile exchanger in the network, that functions as a conventional network element, receives the first and the second information of a subscriber through communicating with the HLR 10 when the subscriber requests location registration. If the location-registered subscriber is called, the exchanger 31, 32 or 33 receives a tone-replacing sound from the sound storager 50

based on the received first and second information, and then provides a caller with the received tone-replacing sound instead of an ordinary tone.

Moreover, if the called has been also subscribed to CWS, the exchanger 31, 32 or 33 furnishes the sound storager 50 with state information (information about busy or not and call-suspended state) of the called through a connection request message when it requests trunk connection to the sound storager 50.

10 The sound storager 50 stores a plurality of digital sounds to be used for replacing an ordinary tone such as RBT and CWT. The stored digital sounds are provided for the exchangers 31, 32 and 33 via the gateway 40.

The SSMS 70 communicates with the sound storager 50 via 15 Internet 60 and it chooses a digital sound based on information written in a tone service table. A unique code to identify the chosen digital sound is notified the sound storager 50 in order that a stored sound identified by the code is sent to the exchanger 31, 32 or 33 from the sound storager 50. The tone 20 service table used for choice of a digital sound allocated for each subscriber includes several codes linked to caller's personal information, caller or caller-group identifying information, call time zone, and/or call state. Therefore, a digital sound can be chosen by the SSMS 70 based on who calls, 25 which group a caller belongs to, age, sex, or occupation of a caller, when a subscriber is called, and/or call state, e.g., busy or call-suspended state.

Information in the tone service table is determined when a person subscribes to the value-added service and is then modified 30 by his or her request.

The web server 100, connected to the sound storager 50 and/or the SSMS 70 via Internet 60, adds digital sounds to the sound storager 50 and conducts operations to update or change contents of the tone service table and codes, if necessary,
5 related digital sounds for the SSMS 70. The updating or changing operation is initiated by subscriber's request through web pages of the web server 100.

The operation of the network of Fig. 1 to provide an arbitrary sound set by a called subscriber instead of a common
10 RBT is described below.

When a subscriber applies for subscription to the value-added service of RBT replacement, all information included in the application is stored in the subscriber db 80 that requests registration of RBT replacement service to the HLR 10. Then, the
15 HLR 10 writes necessary information in value-added service parameters of that subscriber.

Afterwards, if location registration for that subscriber is requested from a serving exchanger 31, 32 or 33, e.g., the exchanger 32 the HLR 10 provides service-related information and
20 routing information for the exchanger 32 that requested location registration. The routing information is needed to make a trunk connection to the soundstorager 50. The exchanger 32 registers the received information for that subscriber in a local subscriber db.

25 If an arbitrary subscriber at the exchanger 31 calls the location-registered subscriber, a trunk connection 'ISUP' is made between the originating 31 and the terminating exchanger 32 after routing information exchange through the HLR 10. After a trunk connection is setup, the terminating exchanger 32, knowing based
30 on the registered information of the called subscriber that RBT

replacement service is ON, makes another trunk connection to the sound storager 50 addressed by the registered information. At the same time, the terminating exchanger 32 provides the sound storager 50 with information of the called subscriber, e.g.,
5 mobile telephone number and starts to page the called.

The sound storager 50 inquires of the SSMS 70 about which digital sound is set now for the called subscriber. Then, the SSMS 70 informs the sound storager 50 of a code for digital sound having been chosen for a given condition by the called.

10 The sound storager 50 sends a digital sound identified by the received code to the originating exchanger 31 through the setup trunk connection between the two exchangers 31 and 32. The originating exchanger 31 transmits the digital sound from the sound storager 50 to the caller until the called answers the
15 paging. Thus, the caller can hear the digital sound instead of a conventional RBT during the paging. The moment the called answers the paging, the terminating exchanger 32 releases the trunk connection established to the sound storager 50. The conversation between the caller and the called is communicated through the
20 trunk connection made between the originating 31 and the terminating exchanger 32.

Fig. 2 is a procedure chart to subscribe to a subscriber-based tone-replacing sound providing service in accordance with the present invention.

25 The procedure chart of Fig. 2 is explained below in parallel with the operation of the network of Fig. 1.

If subscription to the tone-replacement service is asked (S201), subscription information including mobile telephone number of the subscriber is stored in the subscriber db 80 first
30 and is then delivered to the HLR 10 (S202). The HLR 10 updates

service information of the subscriber profile to indicate that the subscriber has subscribed to tone replacement service (S203).

In addition, the subscriber db 80 also sends the subscription information including a chosen digital sound and 5 mobile telephone number to the SSMS 70 (S204). The SSMS 70 writes a code associated with the chosen digital sound in a tone service table allocated for that mobile telephone number (S205).

If the received subscription information includes particulars of sound assignments, namely if the received 10 subscription information assigns different digital sounds for each caller, each caller group, each time zone, and/or each call state, the SSMS 70 writes different codes of the respective digital sounds in each condition field of the tone service table, at the step S205.

15 Afterwards, if location registration for the subscriber is requested from the exchanger 32 to the HLR 10 (S206), the HLR 10 checks profile of the subscriber to know whether the subscriber has been subscribed to the RBT replacement service (S207). If not subscribed, the HLR 10 sends an ordinary response message to the 20 location registration request to the exchanger 32 as in the conventional request processing procedure (S208-1). However, if subscribed, the HLR 10 sends the exchanger 32 a response message including tone replacement service-related information, namely, service setting information and routing information, e.g., 25 routing digits to direct to the sound storager 50 assigned for that subscriber among a plurality of sound storagers (not figured). The exchanger 32 registers the received information in the subscriber's profile on a local db, e.g., a VLR (Visitor Location Register) (S208-2).

30 The service setting information can be carried by an SRBT

(Specific RBT) field, which was defined as a 'reserve' field before, of the value-added service parameters 'CallingFeaturesIndicator2' shown in Fig. 7. The 2-bit SRBT field is set to '10' in case that the tone replacement service is not activated even though that service is valid by subscription, and it is set to '11' in case that the tone replacement service is in active state. A message including the parameters 'CallingFeaturesIndicator2' responsive to the location registration request is delivered from the HLR 10 to the exchanger 32.

The service information parameters

'CallingFeaturesIndicator2' of Fig. 7 are composed of a VMSB field indicative of state of voice mail service busy; a VMSU field indicative of state of voice mail service busy unconditional; a VMSNA field indicative of state of voice mail service busy no answer; an FMSNA field indicative of state of fax mail service no answer; an FMSB field indicative of state of fax mail service busy; an FMSU field indicative of state of fax mail service unconditional; an MC field indicative of multi-call; a CC field indicative of conference call; an MUDN field indicative of multiple unit directory number; and others.

Fig. 3 is a procedure chart to change/add tone-replacing sound to be used in tone replacement service in accordance with the present invention.

25 A subscriber, who has subscribed to the tone replacement service according to the above-explained procedure of Fig. 2, connects his or her personal computer to the web server 100, first. Then, the web server 100 provides web pages on the connected computer screen to enable the subscriber to change/add
30 information about tone replacement service.

The subscriber enters mobile telephone number (or telephone number + password allocated in subscription) through an adequate web page and then selects a desired tone-replacing sound from a list showing all or a part of sounds stored in the sound storager 50. If the subscriber requests change of tone-replacing sound to the chosen one (S301), the web server 100 sends a change-requesting message to the SSMS 70 (S302). The SSMS 70 changes the current code with another code assigned to the chosen tone-replacing sound in a tone service table allocated for the entered mobile telephone number (S303). Afterwards, a tone-replacing sound identified by the changed code will be provided instead of a conventional RBT and/or CWT.

If the subscriber selects to add a new tone-replacing sound on a web page, the SSMS 70 provides an input web page. Then, the subscriber enters his or her mobile telephone number in the input web page and uploads a sound file including voice, sound logo, or music through the input web page (S304). The web server 100 requests the sound storager 50 to add a new tone-replacing sound by delivering the inputted data to the sound storager 50 (S305). The sound storager 50 registers the uploaded sound file as a new tone-replacing sound (S306) and requests the SSMS 70 to assign a new code to the registered tone-replacing sound (S307). The SSMS 70 informs the sound storager 50 of the newly-assigned code and changes the current code with the newly-assigned code in the tone service table allocated for the subscriber.

Fig. 4 is a procedure chart to terminate a subscriber-based tone-replacement service in accordance with the present invention.

If termination of tone replacement service is asked from a subscriber (S401), the subscriber db 80 deletes subscription information for tone replacement service associated with the

subscriber, namely, the subscriber's telephone number, and sends service terminating information including a mobile telephone number to the HLR 10 (S402). The HLR 10 alters service information of the subscriber's profile to indicate that the
5 subscriber has not subscribed to tone replacement service (S403).

The subscriber db 80 also sends the service terminating information to the SSMS 70 (S404), then the SSMS 70 deletes a current code in the tone service table for the subscriber based on the received service terminating information (S405).

10 Fig. 5 is a procedure chart of an embodiment of the present invention to conduct a CWS subscriber-based tone-replacing service after completion of the procedure of Fig. 2 and/or Fig. 3.

If an arbitrary subscriber within a service zone of the exchanger 31 calls another subscriber, who has subscribed to the
15 tone replacement service, within the exchanger 32, the originating exchanger 31 sends a location request message to the HLR 10 to inquire where the called is (S501). Then, the HLR 10 sends a routing request message to the terminating exchanger 32 (S502), and the terminating exchanger 32 informs the HLR 10 of
20 routing information, e.g., TLDN (Temporary Local Directory Number) in response to the routing request message (S503).

The HLR 10 delivers the routing information to the originating exchanger 31 in response to the inquiry step S501 (S504). The originating exchanger 31 requests the terminating
25 exchange 32 based on the routing information to make a trunk connection therebetween (S505).

In the meantime, the terminating exchanger 32 checks service setting information, namely, the 'SRBT' field of the value-added service information of Fig. 7 that was registered for
30 the called in its local db at the step S208-2 in the procedure of

Fig. 2. If the two bits of the 'SRBT' field are '11', the terminating exchanger 32 regards tone-replacement service for the called as 'in-service' and 'activated' and checks state (idle, busy or call-suspended) of the called if the called has
5 subscribed to CWS. Then, it makes a trunk connection to the sound storager 50 with reference to the routing information that was also received and stored at the step S208-2. At this time, mobile telephone numbers of the caller and the called are sent to the sound storager 50 along with the checked the called's state
10 (S506).

Now, respective trunk connections are made between the originating exchanger 31 and the terminating one 32 and between the terminating exchanger 32 and the sound storager 50.

The sound storager 50 asks an adequate code to the SSMS 70
15 while providing the received numbers and the called's state for the SSMS 70 (S507). The SSMS 70 examines a tone service table allocated for the called number to determine a code matched with the calling number and the called's state, and informs the sound storager 50 of the determined code (S508) in response to the
20 code-requesting step S507. The sound storager 50 transmits a tone-replacing sound corresponding to the determined code to the caller instead of an RBT or another uniform tone through the trunk connections between the sound storager 50 and the terminating exchanger 32 and between the terminating exchanger 32
25 and the originating one 31 (S509).

The steps between S506 to S509 inclusive are explained in more detail.

In the event that the called has subscribed to CWS and not to tone-replacing service, the terminating exchanger 32 provides
30 the caller with a uniform RBT if the called has already been

connected to a former caller. However, if the called has subscribed to tone-replacing service, the state of busy is delivered to the sound storager 50 at the step S506. The sound storager 50 asks the SSMS 70 to notify of a sound code adequate to busy state of the called (S507) while giving necessary information such as called's identification to the SSMS 70.

Knowing that the called is busy from the received information, the SSMS 70 searches a tone service table of the called stored in its db structured as Fig. 8 for a sound code associated with busy state and delivers the found code to the sound storager 50 (S508) in response to the code-requesting step S507. The sound storager 50 transmits a tone-replacing sound linked with the determined code to the caller as an RBT through the trunk path made between the sound storager 50 and the originating exchanger 31 (S509). Therefore, if a voice message to inform that call acceptance is being urged to a busy called is registered as a tone-replacing sound for busy state in CWS, a caller is able to know the current call state through the tone-replacing sound. This would decrease callers' call cancellations by leading callers to wait until call connection.

If the called answers the new call or switches to the new call of the terminating exchanger 32 from an already-connected call while the determined tone-replacing sound is being transmitted instead of a conventional RBT, the terminating exchanger 32 requests the sound storager 50 to release the established trunk connection (S510). Then, voice or data are communicated between the caller and the called through the trunk connection between the originating 31 and the terminating exchanger 32 (S511).

Fig. 6 is a procedure chart of another embodiment of the

present invention to conduct a CWS subscriber-based tone-replacing service after completion of the procedure of Fig. 2 and/or Fig. 3.

If a first arbitrary subscriber within a service zone of a first originating exchanger 33 calls another subscriber, who has subscribed to both the tone replacement service and CWS, within the exchanger 32, the first originating exchanger 33 sends a location request message to the HLR 10 to inquire where the called is (S601). Then, the HLR 10 sends a routing request message to the terminating exchanger 32 (S602), and the terminating exchanger 32 informs the HLR 10 of routing information, e.g., TLDN (Temporary Local Directory Number) in response to the routing request message (S603).

The HLR 10 delivers the routing information to the first originating exchanger 33 in response to the inquiry step S601 (S604). The first originating exchanger 33 requests the terminating exchange 32 based on the routing information to make a trunk connection therebetween (S605).

In the meantime, the terminating exchanger 32 checks service setting information, namely, the 'SRBT' field of the value-added service information of Fig. 7 that was registered for the called in its local db at the step S208-2 in the procedure of Fig. 2. If the two bits of the 'SRBT' field are '11', the terminating exchanger 32 regards tone-replacement service for the called as 'in-service' and 'activated' and identifies idle state of the called. Then, it makes a trunk connection to the sound storager 50 with reference to the routing information that was also received and stored at the step S208-2. At this time, mobile telephone numbers of the caller and the called are sent to the sound storager 50 along with the identified idle state of the

called (S606).

Now, respective trunk connections are made between the first originating exchanger 33 and the terminating one 32 and between the terminating exchanger 32 and the sound storager 50.

5 The sound storager 50 asks an adequate code to the SSMS 70 while providing the received numbers and the called's state, namely idle state for the SSMS 70 (S607). The SSMS 70 examines a tone service table allocated for the called number to determine a code matched with the calling number and the idle state, and
10 informs the sound storager 50 of the determined code (S608) in response to the code-requesting step S607. The sound storager 50 transmits a tone-replacing sound corresponding to the determined code to the first caller as an RBT through the trunk path to the first originating exchanger 33 (S609).

15 If the called answers call arrival from the terminating exchanger 32 while the determined tone-replacing sound is being transmitted instead of a conventional RBT, the terminating exchanger 32 requests the sound storager 50 to release the established trunk connection (S610). Then, voice or data are
20 communicated between the first caller and the called through the trunk connection between the first originating 33 and the terminating exchanger 32 (S611).

 If a second arbitrary subscriber within a service zone of a second originating exchanger 31 calls the called who is talking
25 over the connected line with the first caller, the second originating exchanger 31 requests the terminating exchange 32 to make a trunk connection therebetween (S621) according to the same steps S501 to S505 that are described in the procedure of Fig. 5.

 Afterwards, the above-explained steps S506 to S509 are
30 sequentially conducted in this embodiment. However, the called's

state to delivered at this time from the terminating exchanger 32 to the sound storager 50 is 'busy'. Therefore, a tone-replacing sound, e.g., voice message to inform "busy in CWS" is provided for the second caller instead of a conventional RBT.

5 While the second caller is waiting call acceptance, if the called accepts the call from the second caller while forcing the current connection to be in call-suspended, namely, call-waiting state, the terminating exchanger 32 acknowledging the call switch releases the trunk connection to the sound storager 50, which was
10 established before by the call of the second caller, in order to stop transmission of the tone-replacing sound. Now, voice or data are communicated between the second caller and the called through the trunk connection between the second originating exchanger 31 and the terminating one 32 (S622).

15 In addition, when the terminating exchanger 32 acknowledges the call switch, it requests another trunk connection to the sound storager 50 for the suspended call of the first caller (S623). This requesting message from the terminating exchanger 32 contains mobile telephone numbers of the called and/or the caller
20 and call-waiting state.

Now, respective trunk connections are made between the two originating exchangers 31 and 33 and the terminating one 32, and an additional trunk connection is made between the terminating exchanger 32 and the sound storager 50 for the first caller.

25 The sound storager 50 asks an adequate code to the SSMS 70 while providing the received numbers and the called's state, namely call-waiting state for the SSMS 70 (S624). The SSMS 70 examines the tone service table, structured as Fig. 8, allocated for the called number to determine a code matched with the
30 calling number and the call-waiting state, and informs the sound

storager 50 of the determined code (S625) in response to the code-requesting step S624. The sound storager 50 transmits a tone-replacing sound corresponding to the determined code to the first caller as a CWT through the trunk path to the first
5 originating exchanger 33 (S626).

Therefore, if a voice message to inform that call is suspended is registered as a tone-replacing sound for call-waiting state in CWS, a suspended caller is able to know the current call state through the tone-replacing sound. This would
10 decrease callers' call drops by preventing misunderstanding that a call is disconnected unexpectedly.

In the above-explained embodiment of Fig. 6, the terminating exchanger 32 may not release the trunk connection which is made at the step S606 or S621 although the connection to
15 the sound storager 50 becomes unnecessary by call connection or a busy called's call acceptance. In this case, remaking of trunk connection, e.g., the step S623 in the embodiment of Fig. 6 can be skipped.

The present invention is not restricted to the above-
20 explained embodiments of Figs. 5 and 6. In other words, if the tone service table in the SSMS 70 is adequately structured or modified and suitable information is served to the sound storager 50 from a terminating exchanger, various tones such as RBT, busy tone, CWT and so forth can be replaced with an arbitrary sound,
25 music or voice that is selected for a called based on who the caller is, which group among groups classified by the called the caller belongs to, caller's age, sex, occupation, called time, call state and/or other factors.

In the present tone-replacing sound providing service, a
30 subscriber can access the HLR 10 to change the SRBT field of the

value-added service parameters.

For instance, when a subscriber presses a special key on his or her mobile telephone the pressed key information is delivered to the HLR 10 which changes the 2-bit SRBT field based on the key information or alternately. However, more significant bit of the two can not be altered because it indicates whether or not subscribed to the tone replacement service. Less significant bit can be altered by the above way because it indicates whether the tone replacement service is activated or not.

10 Thus, in case of a person having subscribed to tone replacement service, The SRBT field of the value-added service parameters for that person has a value of '10' or '11' only where the value '10' is indicative of 'inactive' of the service and '11' indicative of 'active'.

15 The special key commands change the 'SRBT' field from '10' to '11' or from '11' to '10'. Consequently, a subscriber can determine at will whether to use a conventional RBT, busy tone, and CWT or to use tone-replacing sound he or she has chosen. If the 'SRBT' field is '10', a terminating exchanger transmits a
20 conventional RBT, busy tone or CWT to a caller or a call-waiter even if a called has subscribed to the tone replacement service.

While the invention has been disclosed with respect to a limited number of embodiments, those skilled in the art, having the benefit of this disclosure, will appreciate numerous
25 modifications and variations therefrom. It is intended that the appended claims cover all such modifications and variations as fall within the true spirit and scope of the invention.

CLAIMS

1. A method of providing an arbitrary sound to replace a conventional tone in a communication network, comprising:

a first step, conducted by an HLR (Home Location Register),
5 of furnishing an exchanger, when a terminal is registered through the exchanger, with first information on whether an ordinary tone is to be replaced or not and second information informing a route to a sound providing means;

a second step, conducted by the exchanger, of requesting a
10 trunk connection to the sound providing means, if the terminal is called by a caller, based on the first and the second information while furnishing the sound providing means with third information on call state; and

a third step, conducted by the sound providing means, of
15 determining a tone-replacing sound based on the received third information for the terminal, and providing the determined tone-replacing sound as a ringback tone to the caller through the exchanger which the trunk connection is made to.

2. A method of providing an arbitrary sound to replace a
20 conventional tone in a communication network, comprising:

a first step, conducted by an HLR (Home Location Register),
of furnishing an exchanger, when a terminal is registered through the exchanger, with first information on whether an ordinary tone is to be replaced or not and second information informing a route
25 to a sound providing means;

a second step, conducted by the exchanger, of requesting a first trunk connection to the sound providing means, if the terminal is called by a latter caller under already-connected

condition to a former caller, based on the first and the second information while providing the sound providing means with third information on call state;

a third step, conducted by the sound providing means, of
5 determining a tone-replacing sound based on the received third information for the terminal, and providing the determined tone-replacing sound as a ringback tone to the latter caller through the exchanger;

a fourth step, conducted by the exchanger, of requesting
10 release of the first trunk connection to the sound providing means, if the terminal accepts the call from the latter caller, and requesting a second trunk connection to the sound providing means for the connected former caller while providing the sound providing means with fourth information on call-switched; and

15 a fifth step, conducted by the sound providing means, of determining a tone-replacing sound based on the received fourth information for the terminal, and providing the determined tone-replacing sound as a call-waiting tone to the former caller through the exchanger which the second trunk connection is made
20 to.

3. The method of claim 1 or 2, wherein the third information is to indicate that the terminal is busy.

4. The method of claim 2, wherein the fourth information is to indicate that either of the callers is suspended to wait for
25 call reconnection.

5. The method of claim 1 or 2, wherein the first information on whether an ordinary tone is to be replaced or not is set in the HLR based on specific key information received from the terminal.

30 6. The method of claim 1 or 2, wherein the first and the

second information are included in a response message to a location registration request message, the response message being sent from the HLR to the exchanger.

7. The method of claim 6, wherein the first information is
5 written in a reserve field allocated in value-added service parameters of subscriber's profile.


8. The method of claim 1 or 2, wherein the sound providing means determines the tone-replacing sound based on who the caller is, which group the caller belongs to among several groups
10 classified by the called, calling time, and/or call state.

9. The method of claim 1 or 2, wherein a message to request the trunk connection to the sound providing means includes called- and caller-identification.

10. The method of claim 1 or 2, wherein the sound providing
15 means changes a current tone-replacing sound specified for the called with another one through communication with a web server operating based on internet protocol.


11. The method of claim 10, wherein said another sound is one already stored in the sound providing means or received newly
20 via the web server.

1/7

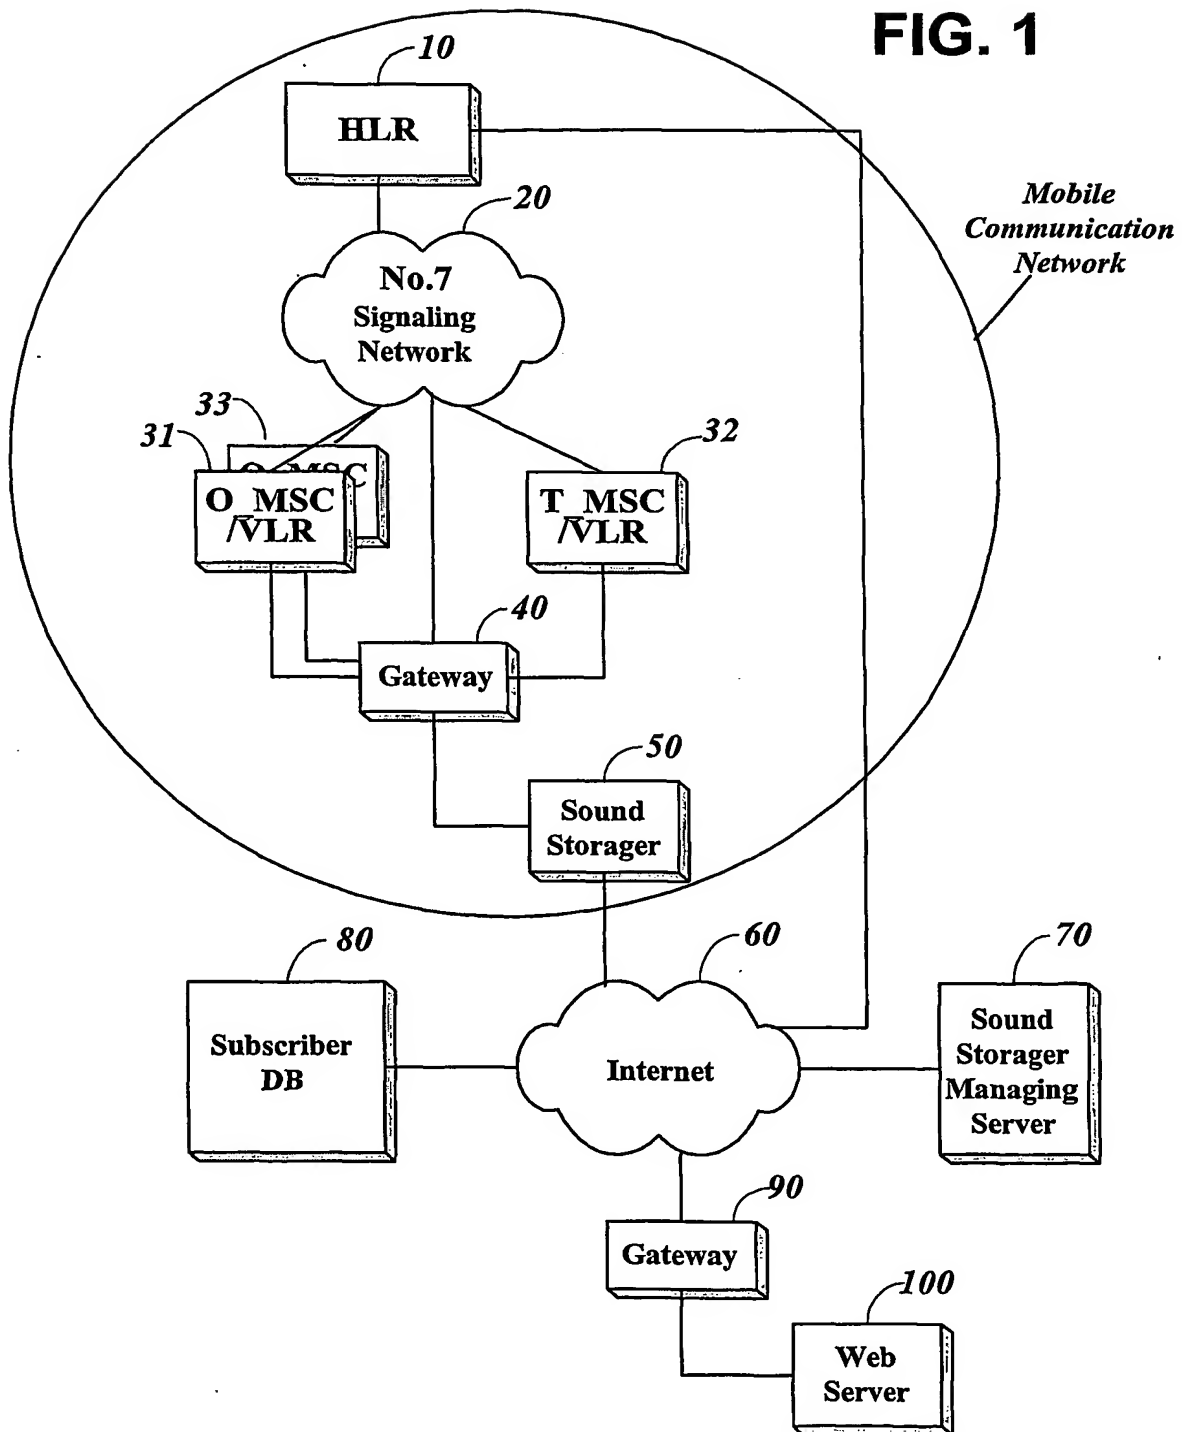FIG. 1


2/7

FIG. 2

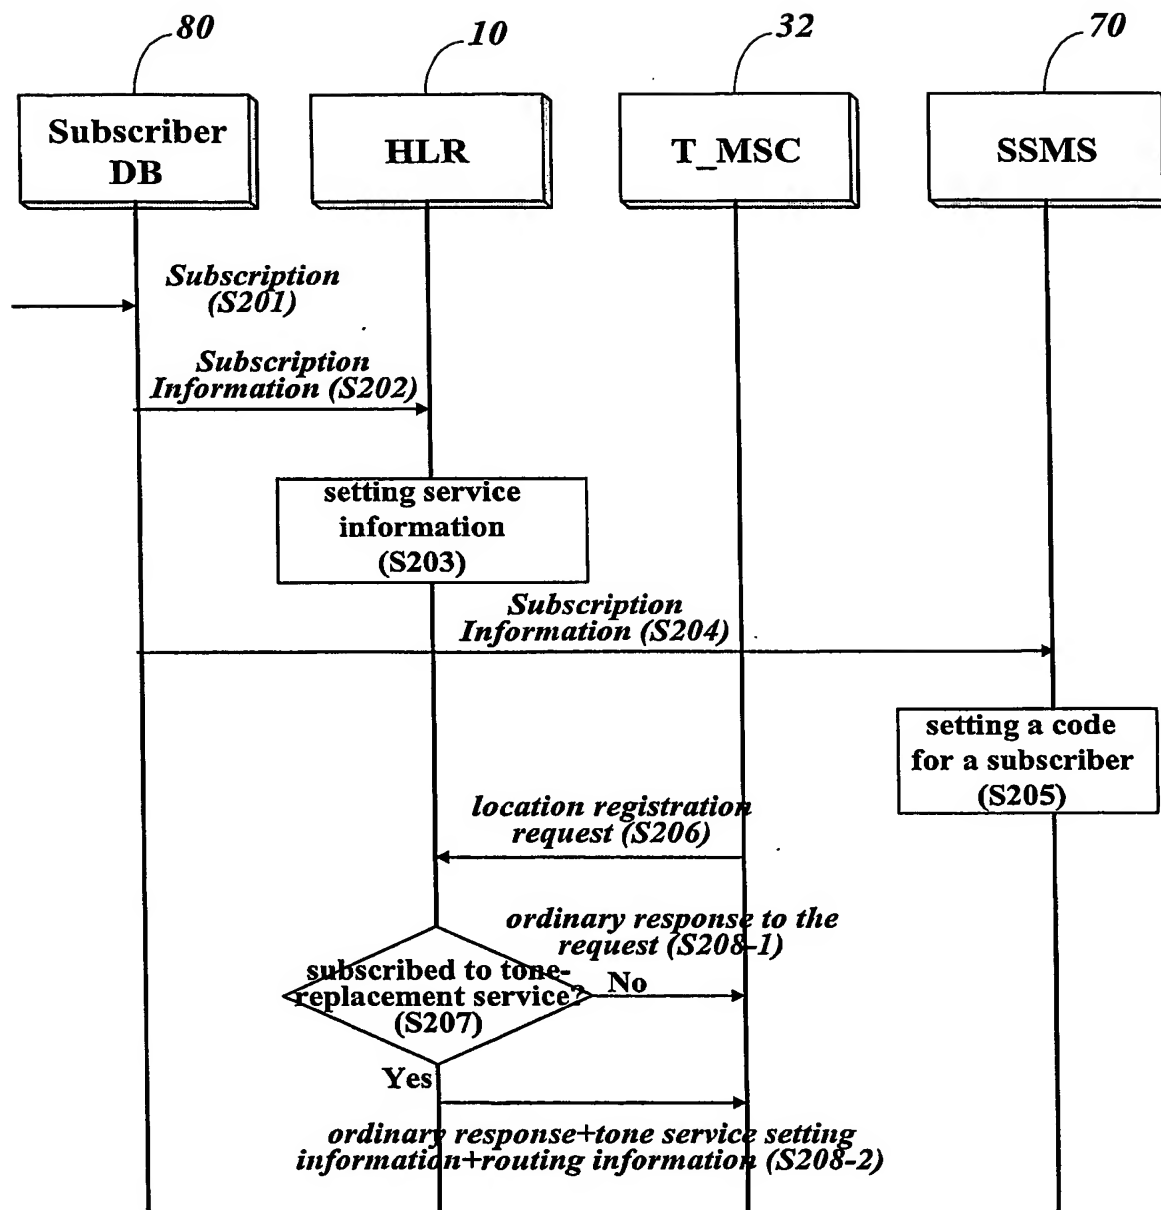

3/7

FIG. 3

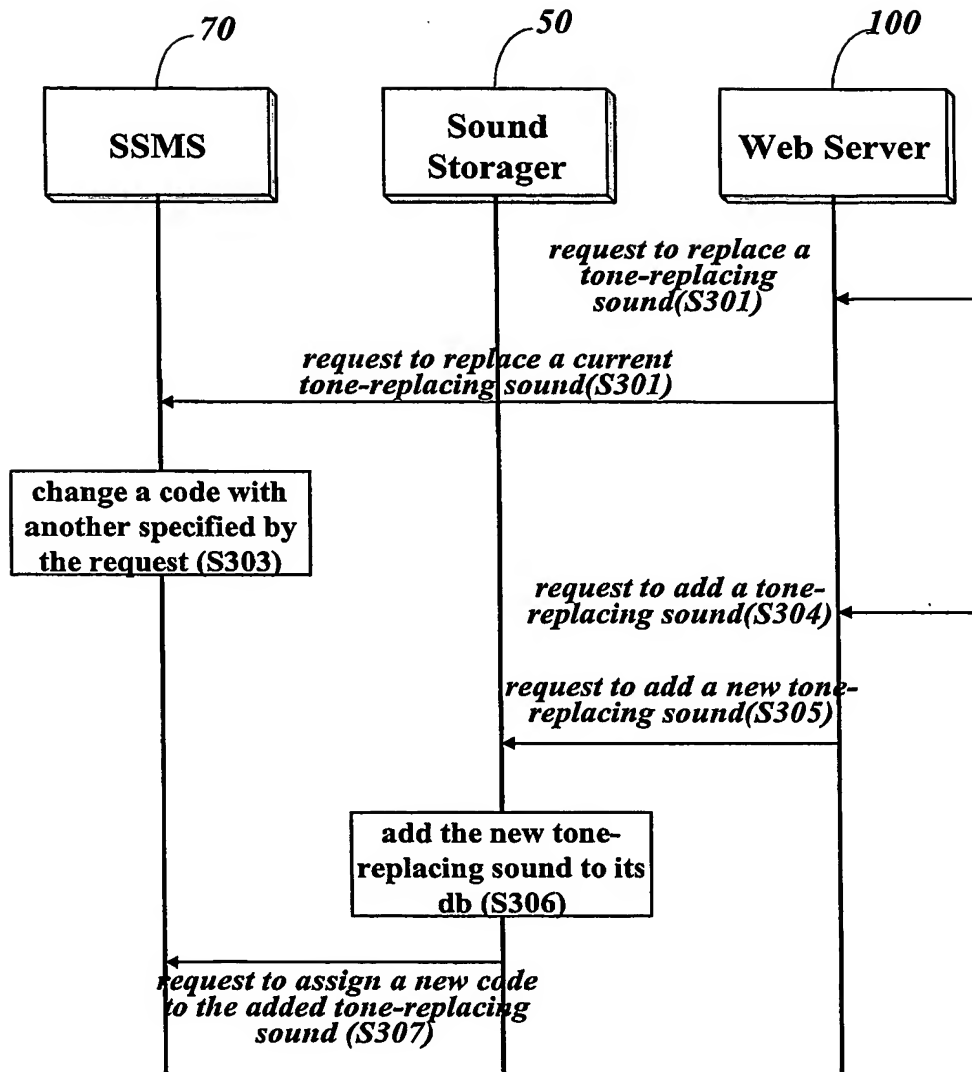

4/7

FIG. 4



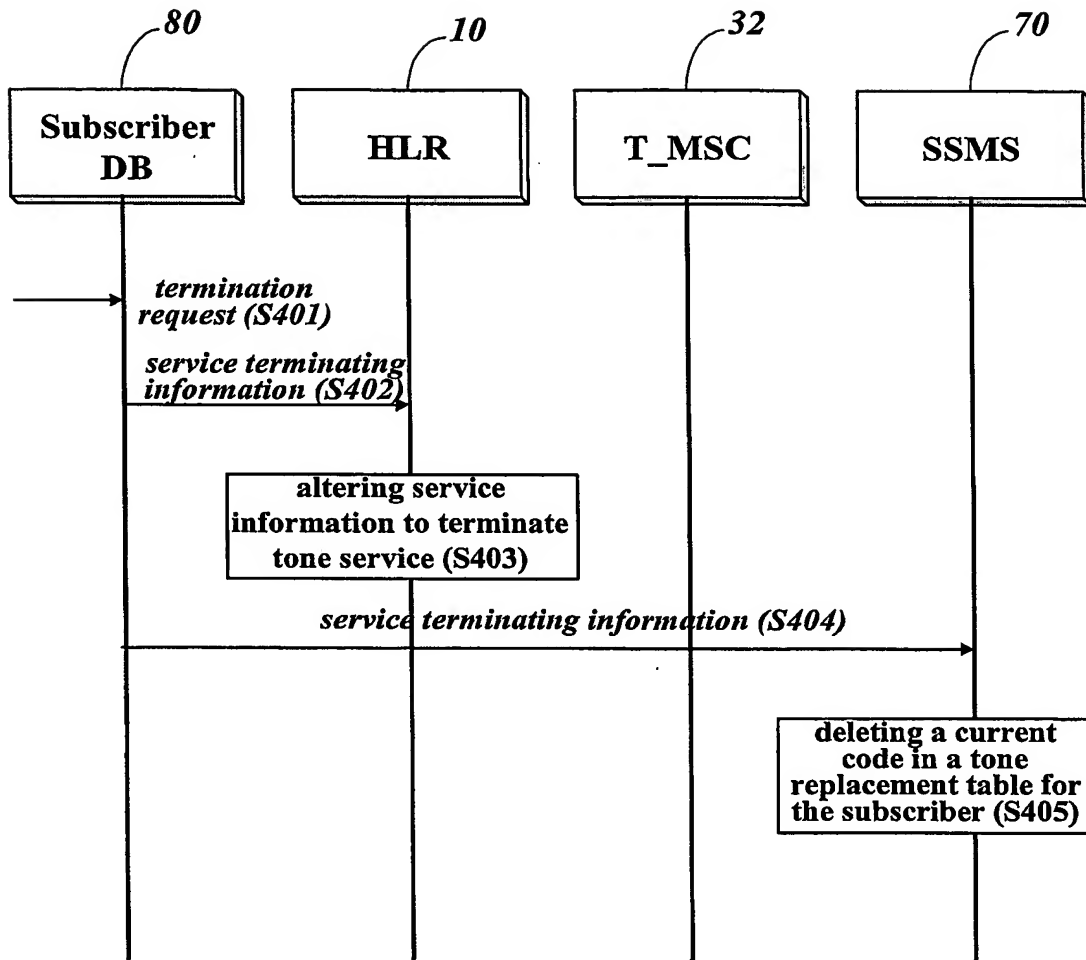


FIG. 5

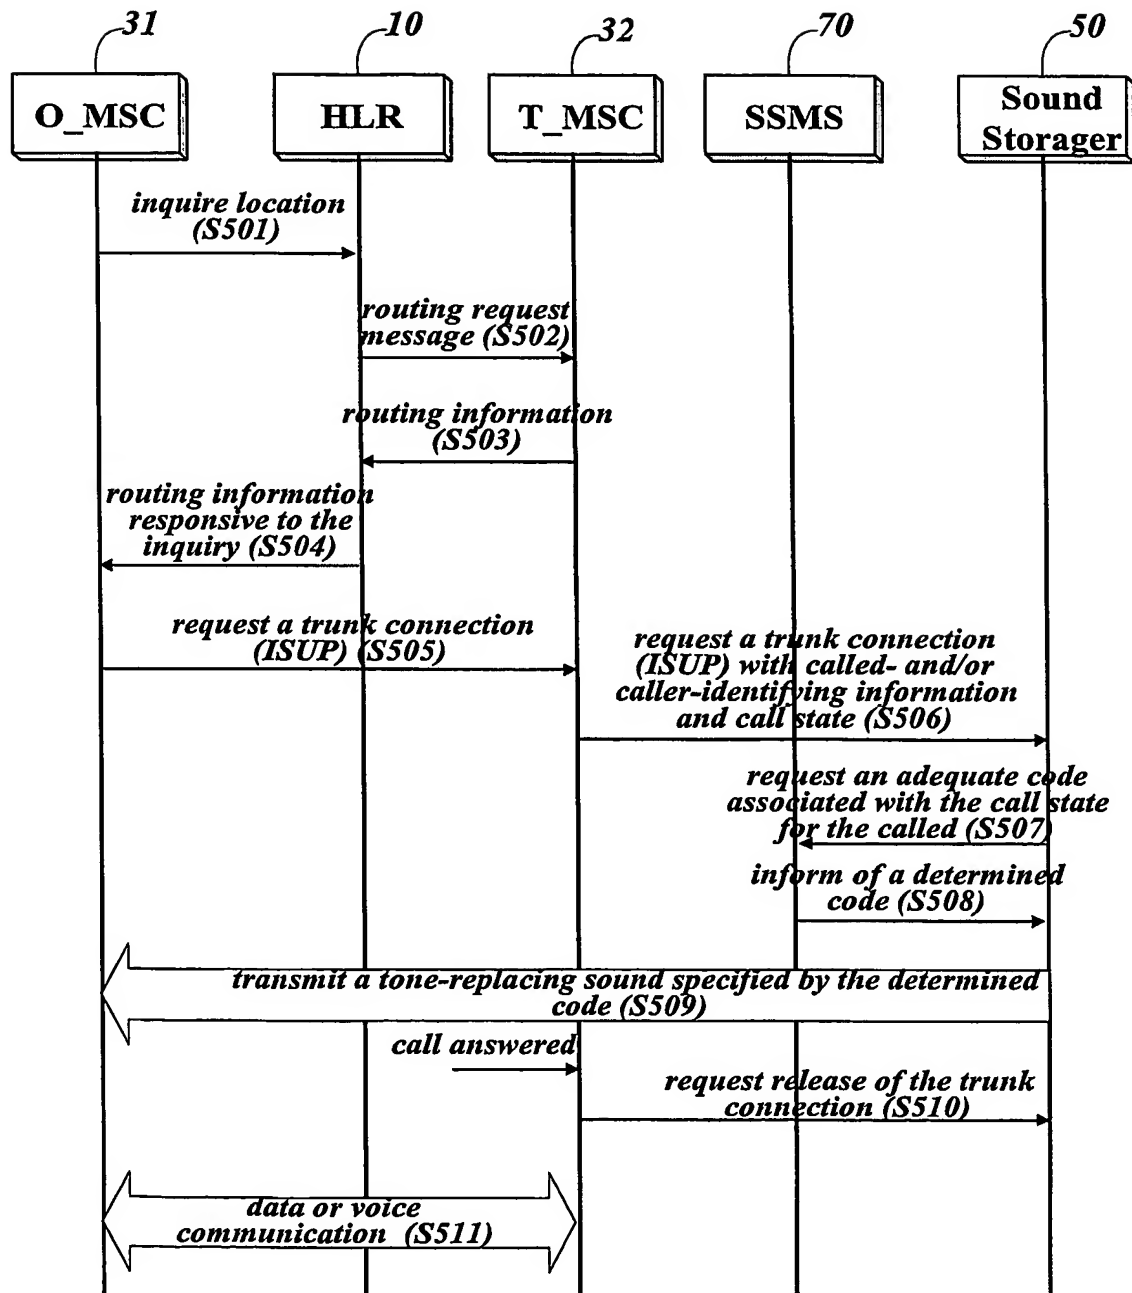

6/7

FIG. 6

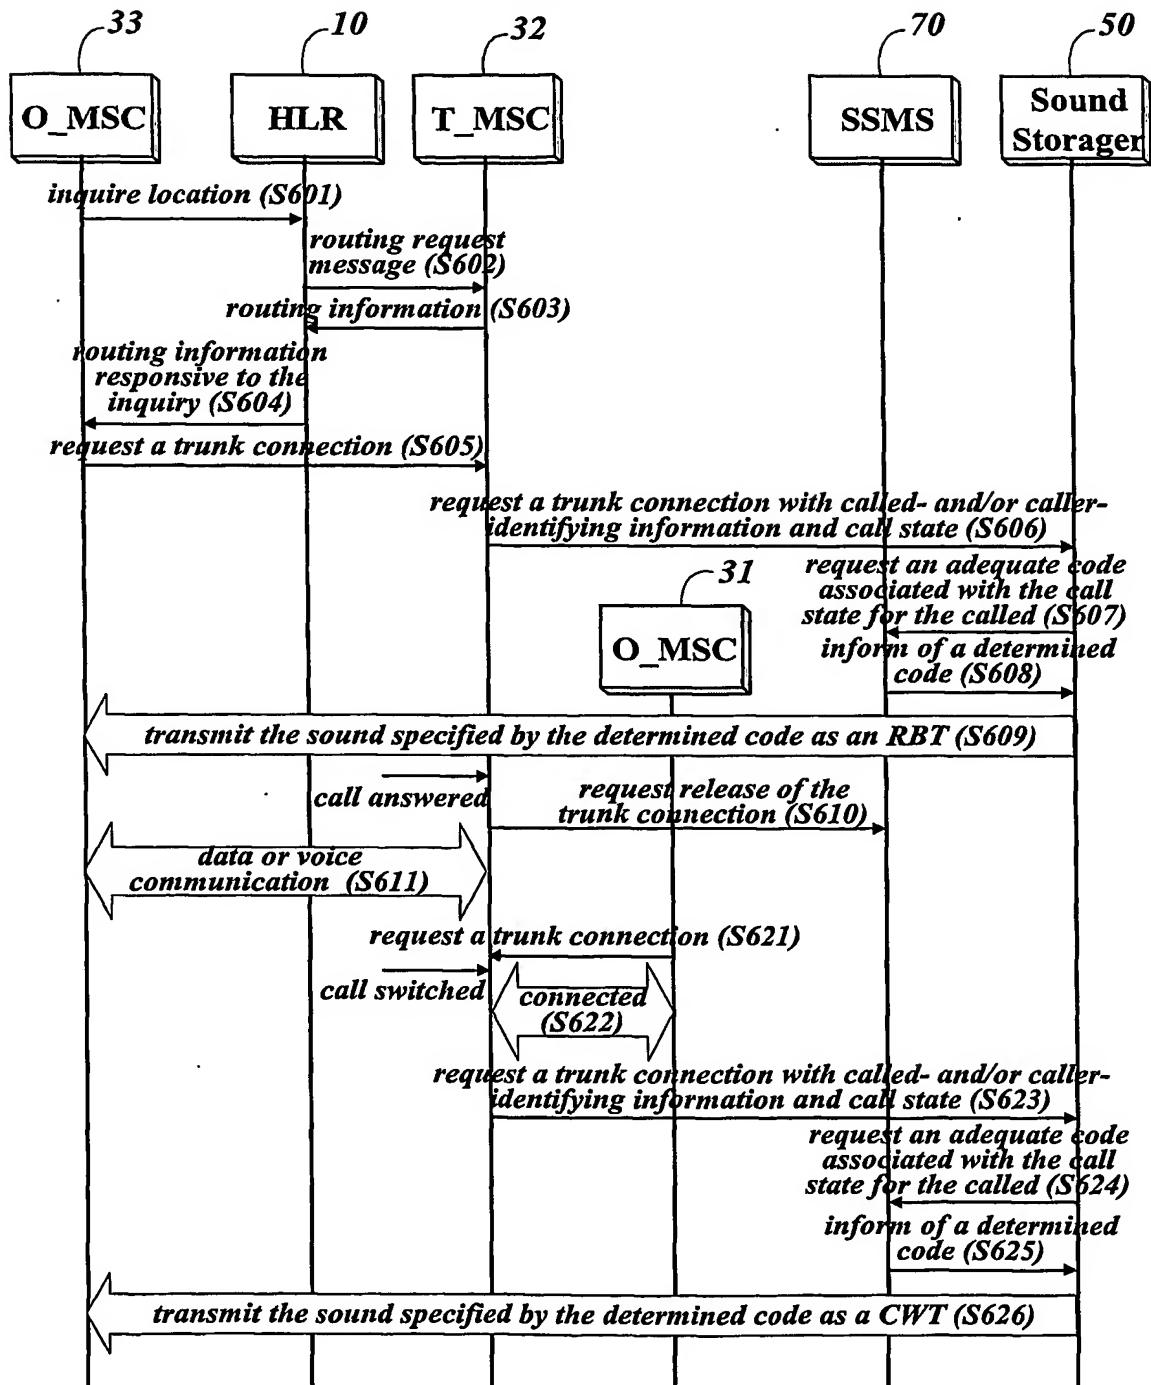

7/7

FIG. 7

Parameter=CallingFeaturesIndicator2						Length=V		Tag=H'9fff7d	
Contents								meaning	
H	G	F	E	D	C	B	A	Octet	Notes
VMSB		VMSU		MC		CC		1	a
FMSNA		FMSB		FMSU		VMSNA		2	
SRBT		NCW		Prefer_Sys		MUDN		3	
.....								n	

defined 'reserve' field before

FIG. 8

subscriber information	sound code for event
XXX-XXX-0001	default code
	code for each caller or each caller group
	code for each calling time zone
	code for busy
	code for call-waiting
	⋮
XXX-XXX-0002	default code
	code for each caller or each caller group
	code for each calling time zone
	code for busy
	code for call-waiting
	⋮
⋮	⋮

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR03/01624

A. CLASSIFICATION OF SUBJECT MATTER

IPC7 H04M 3/58

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7 H04M 3/58

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

KOREAN PATENTS AND APPLICATIONS FOR INVENTIONS SINCE 1975

KOREAN UTILITY MODELS AND APPLICATIONS FOR UTILITY MODELS SINCE 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Korean Intellectual Property Office Patent Search System "ringback & tone"

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	KR 10-2002-39501 A (LG ELECTRONICS CO.LTD) 27. MAY. 2002(2002.05.27) * THE WHOLE DOCUMENT	1-11
A	KR 10-1999-55454 A (SAMSUNG ELECTRONICS CO. LTD) 15. JUL. 1999(1999.07.15) * THE WHOLE DOCUMENT	1-11
A	KR 1020010079142 A (YONG, OK JONE) 22.AUG.2001(2001.08.22) * THE WHOLE DOCUMENT	1-11
A	KR 102000000244 A (PARK, JONG HYUN) 22.JAN.2000(2000.01.15) * THE WHOLE DOCUMENT	1-11

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

14 NOVEMBER 2003 (14.11.2003)

Date of mailing of the international search report

14 NOVEMBER 2003 (14.11.2003)

Name and mailing address of the ISA/KR



Korean Intellectual Property Office
920 Dunsan-dong, Seo-gu, Daejeon 302-701,
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

UHM, In Kwon

Telephone No. 82-42-481-5712

